



S17, S17 Pro Server Installation Guide

Document Version 0.1

Apr. 2019

© Copyright Bitmaintech Pte.Ltd. 2007 – 2019. All rights reserved.

Bitmaintech Pte.Ltd. (Bitmain) reserves the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice.

Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to Bitmain's terms and conditions of sale supplied at the time of order acknowledgment.

Bitmain warrants performance of its products to the specifications applicable at the time of sale in accordance with Bitmain's standard warranty. Testing and other quality control techniques are used to the extent Bitmain deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Bitmain assumes no liability for third-party applications assistance. Customers are responsible for their products and applications using Bitmain components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

Bitmain does not warrant or represent that any license, either express or implied, is granted under any Bitmain patent right, copyright or other Bitmain intellectual property right relating to any combination, machine, or process in which Bitmain products or services are used. Information published by Bitmain regarding third-party products or services does not constitute a license from Bitmain to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from Bitmain under the patents or other intellectual property of Bitmain.

Resale of Bitmain products or services with statements different from or beyond the parameters stated by Bitmain for that product or service voids all express and any implied warranties for the associated Bitmain product or service and is an unfair and deceptive business practice. Bitmain is not responsible or liable for any such statements.

All company and brand products and service names are trademarks or registered trademarks of their respective holders.

All text and figures included in this publication are the exclusive property of Bitmaintech Pte.Ltd. (Bitmain), and may not be copied, reproduced, or used in any way without the express written permission of Bitmain. Information in this document is subject to change without notice and does not represent a commitment on the part of Bitmain. Although the information in this document has been carefully reviewed, Bitmain does not warrant it to be free of errors or omissions. Bitmain reserves the right to make corrections, updates, revisions or changes to the information in this document.

Bitmaintech Pte.Ltd.
Tel:+86-400-890-8855
www.bitmain.com

Table of Contents

1.Overview..... 4

 1.1 S17, S17 Pro Server Components..... 5

 1.2 Specifications..... 7

2. Setting Up the Server..... 15

3. Configuring the Server..... 17

4. Monitoring Your Server..... 19

5. Administering Your Server..... 21

 5.1 Checking Your Firmware Version..... 21

 5.2 Upgrading Your System..... 22

 5.3 Modifying Your Password..... 23

 5.4 Restoring Initial Settings..... 23

Environmental Requirements..... 24

Regulations..... 26

1. Overview

The S17, S17 Pro servers are Bitmain's newest versions in the S17 server series. Power supply APW9 is part of S17, S17 Pro servers. All S17, S17 Pro servers are tested and configured prior to shipping to ensure easy set up.



Front View



Back View




Placement

Caution:


- 1.The equipment must be connected to an earthed mains socket-outlet. The socket-outlet shall be installed near the equipment and shall be easily accessible.
- 2.The equipment has two power inputs, only by connecting those two power supply sockets simultaneously can the equipment run. When the equipment is powered off, be sure to power off all power inputs.
- 3.Please refer to the layout above to place your goods in usage in case of any damage.

1.1 S17, S17 Pro Server Components

The main components and controller front panel of S17, S17 Pro servers are shown in the following figure:

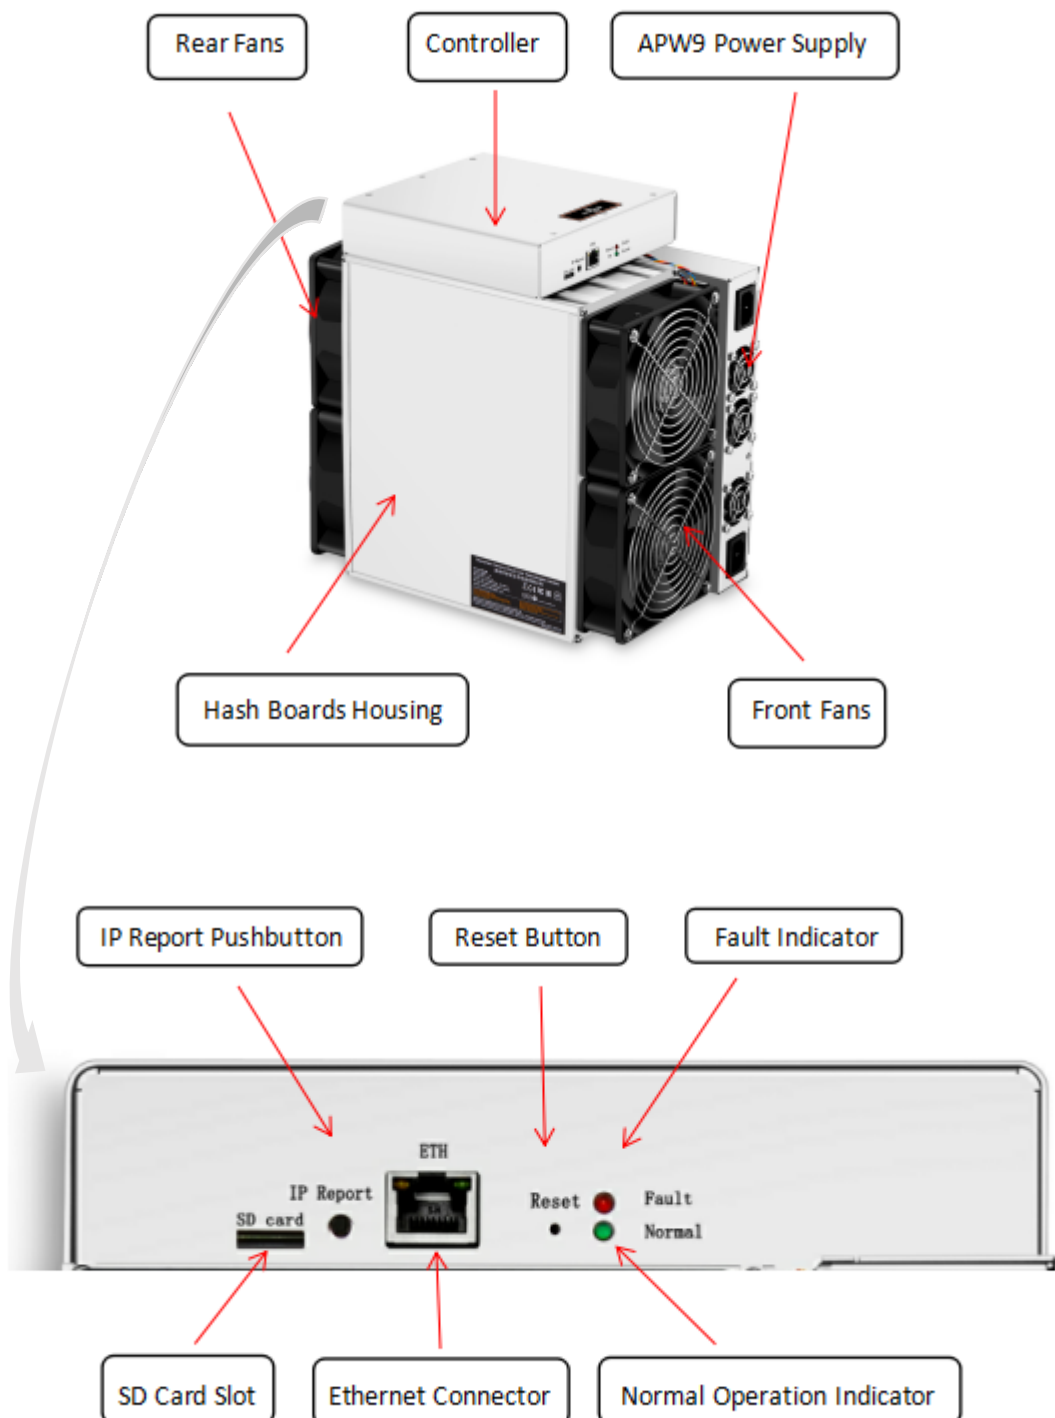

APW9 Power Supply:

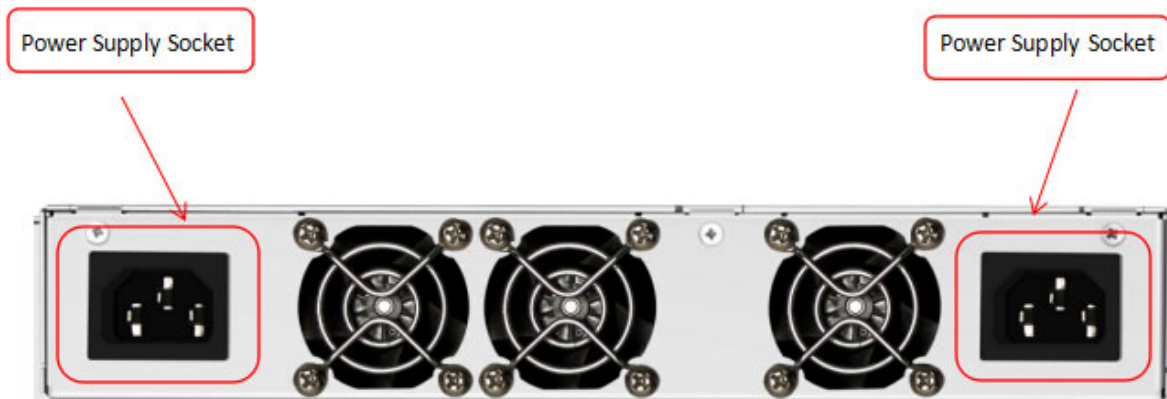

Note:



- 1.Power supply APW9 is part of S17, S17 Pro servers. For detailed parameters, please refer to the specifications below.
- 2.Additional two power cords are needed.

1.2 Specifications

Model No.: 240-Aa

Version: S17-53T

Product Glance	Value	
	Low Power	Normal
Crypto Algorithm/Coins	SHA256/BTC/BCH	
Hashrate, TH/s	35~50.00	53.00
Reference power on wall, Watt	1470~2100	2385
Reference power efficiency on wall @25°C, J/TH	42.00	45.00

Detailed Characteristics		Value		
		Min	Typ	Max
Hashrate & Power				
Hashrate, TH/s	Low Power		35~50.00	+3% ⁽¹⁻¹⁾
	Normal		53.00	55.95
Power efficiency on wall @25°C, J/TH	Low Power	42.00		46.20
	Normal	45.00		49.50
Power efficiency on wall @40°C, J/TH	Low Power	43.81		48.19
	Normal	46.47		51.11
Power on wall, Watt ⁽¹⁻²⁾	Low Power	1470~2100		2482
	Normal	2385		2860
Power supply AC input voltage, Volt ⁽¹⁻³⁾		200	220	240
Power supply AC input current, Amp ⁽¹⁻⁴⁾	Low Power		6.68~9.55	12.41
	Normal		10.84	14.30
Power supply Input AC Frequency Range, Hz		47	50	63
Hardware Configuration				
Quantity of hash chips	144			
Quantity of hash boards	3			
Networking connection mode	RJ45 Ethernet 10/100M			

Server Size (Length*Width*Height, w/o package), mm ⁽²⁻¹⁾	298.2*178.0*296.6			
Net weight, kg ⁽²⁻²⁾	9.50			
Noise, dBA @25°C ⁽²⁻³⁾				82
Environmental Requirements				
Operation temperature,°C		0	25	40
Storage temperature,°C		-20	25	70
Operation humidity, RH (no condensation)		10%		90%

Notes:

- (1-1) In Low Power Mode, Max Hashrate is about **Typ Hashrate *103%**
- (1-2) Min condition: 25°C, min J/TH, typical Hashrate
Max condition: 40°C, max J/TH, max Hashrate
- (1-3) Caution: Wrong input voltage may probably cause server damaged**
- (1-4) Typ condition: min reference power, typical AC input voltage
Max condition: max reference power, min AC input voltage
- (2-1) Including PSU size
- (2-2) Including PSU weight
- (2-3) Max condition: Fan is under max RPM(rotation per minute).

Model No.: 240-Aa

Version: S17-56T

Product Glance	Value	
	Low Power	Normal
Crypto Algorithm/Coins	SHA256/BTC/BCH	
Hashrate, TH/s	35.00~50.00	56.00
Reference power on wall, Watt	1470~2100	2520
Reference power efficiency on wall @25°C, J/TH	42.00	45.00

Detailed Characteristics		Value		
		Min	Typ	Max
Hashrate & Power				
Hashrate, TH/s	Low Power		35~50.00	+3% ⁽¹⁻¹⁾
	Normal		56.00	58.95
Power efficiency on wall @25°C, J/TH	Low Power	42.00		46.20
	Normal	45.00		49.50
Power efficiency on wall @40°C, J/TH	Low Power	43.98		48.38
	Normal	47.42		52.17
Power on wall, Watt ⁽¹⁻²⁾	Low Power	1470 ~2100		2492
	Normal	2520		3075
Power supply AC input voltage, Volt ⁽¹⁻³⁾		200	220	240
Power supply AC input current, Amp ⁽¹⁻⁴⁾	Low Power		6.68~9.55	12.46
	Normal		11.45	15.38
Power supply Input AC Frequency Range, Hz		47	50	63
Hardware Configuration				
Quantity of hash chips	144			
Quantity of hash boards	3			
Networking connection mode	RJ45 Ethernet 10/100M			
Server Size (Length*Width*Height, w/o package),mm ⁽²⁻¹⁾	298.2*178.0*296.6			
Net weight, kg ⁽²⁻²⁾	9.50			

Noise, dBA @25°C ⁽²⁻³⁾				82
Environmental Requirements				
Operation temperature, °C		0	25	40
Storage temperature, °C		-20	25	70
Operation humidity, RH(no condensation)		10%		90%

Notes:

- (1-1) In Low Power Mode, Max Hashrate is about **Typ Hashrate *103%**
- (1-2) Min condition: 25°C, min J/TH, typical Hashrate
Max condition: 40°C, max J/TH, max Hashrate
- (1-3) Caution: Wrong input voltage may probably cause server damaged**
- (1-4) Typ condition: min reference power, typical AC input voltage
Max condition: max reference power, min AC input voltage
- (2-1) Including PSU size
- (2-2) Including PSU weight
- (2-3) Max condition: Fan is under max RPM(rotation per minute).

Model No.: 240-Aa
Version: S17 Pro-50T

Product Glance	Value		
	Low Power	Normal	Turbo
Crypto Algorithm/Coins	SHA256/BTC/BCH		
Hashrate, TH/s	36~48.00	50.00	50~62.00
Reference power on wall, Watt	1296~1728	1975	2250~2790
Reference power efficiency on wall @25°C, J/TH	36.00	39.50	45.00

Detailed Characteristics		Value		
		Min	Typ	Max
Hashrate & Power				
Hashrate, TH/s	Low Power		36~48.00	+3% ⁽¹⁻¹⁾
	Normal		50.00	52.95
	Turbo		50~62.00	+3% ⁽¹⁻²⁾
Power efficiency on wall @25°C, J/TH	Low Power	36.00		39.60
	Normal	39.50		43.45
	Turbo	45.00		49.50
Power efficiency on wall @40°C, J/TH	Low Power	38.30		42.12
	Normal	41.50		45.64
	Turbo	47.25		51.98
Power on wall, Watt ⁽¹⁻³⁾	Low Power	1296~1728		2082
	Normal	1975		2417
	Turbo	2250~2790		3319
Power supply AC input voltage, Volt ⁽¹⁻⁴⁾		200	220	240
Power supply AC input current, Amp ⁽¹⁻⁵⁾	Low Power		5.89~7.85	10.41
	Normal		8.98	12.08
	Turbo		10.23~12.68	16.60
Power supply Input AC Frequency Range, Hz		47	50	63
Hardware Configuration				

Quantity of hash chips	144			
Quantity of hash boards	3			
Networking connection mode	RJ45 Ethernet 10/100M			
Server Size (Length*Width*Height, w/o package),mm ⁽²⁻¹⁾	298.2*178.0*296.6			
Net weight, kg ⁽²⁻²⁾	9.50			
Noise, dBA @25°C ⁽²⁻³⁾				82
Environmental Requirements				
Operation temperature,°C		0	25	40
Storage temperature,°C		-20	25	70
Operation humidity, RH(no condensation)		10%		90%

Notes:

- (1-1) In Low Power Mode, Max Hashrate is about **Typ Hashrate *103%**
- (1-2) In Turbo Mode, Max Hashrate is about **Typ Hashrate *103%**
- (1-3) Min condition: 25°C, min J/TH, typical Hashrate
Max condition: 40°C, max J/TH, max Hashrate
- (1-4) Caution: Wrong input voltage may probably cause server damaged**
- (1-5) Typ condition: min reference power, typical AC input voltage
Max condition: max reference power, min AC input voltage
- (2-1) Including PSU size
- (2-2) Including PSU weight
- (2-3) Max condition: Fan is under max RPM(rotation per minute).

Model No.: 240-Aa
Version: S17 Pro-53T

Product Glance	Value		
	Low Power	Normal	Turbo
Crypto Algorithm/Coins	SHA256/BTC/BCH		
Hashrate, TH/s	36~48.00	53.00	53~62.00
Reference power on wall, Watt	1296~1728	2094	2385~2790
Reference power efficiency on wall @25°C, J/TH	36.00	39.50	45.00

Detailed Characteristics		Value		
		Min	Typ	Max
Hashrate & Power				
Hashrate, TH/s	Low Power		36~48.00	+3% ⁽¹⁻¹⁾
	Normal		53.00	55.95
	Turbo		53~62.00	+3% ⁽¹⁻²⁾
Power efficiency on wall @25°C, J/TH	Low Power	36.00		39.60
	Normal	39.50		43.45
	Turbo	45.00		49.50
Power efficiency on wall @40°C, J/TH	Low Power	38.22		42.05
	Normal	41.73		45.90
	Turbo	47.99		52.79
Power on wall, Watt ⁽¹⁻³⁾	Low Power	1296~1728		2079
	Normal	2094		2568
	Turbo	2385~2790		3371
Power supply AC input voltage, Volt ⁽¹⁻⁴⁾		200	220	240
Power supply AC input current, Amp ⁽¹⁻⁵⁾	Low Power		5.89~7.85	10.40
	Normal		9.52	12.84
	Turbo		10.84~12.68	16.86
Power supply Input AC Frequency Range, Hz		47	50	63

Hardware Configuration				
Quantity of hash chips	144			
Quantity of hash boards	3			
Networking connection mode	RJ45 Ethernet 10/100M			
Server Size (Length*Width*Height, w/o package),mm ⁽²⁻¹⁾	298.2*178.0*296.6			
Net weight, kg ⁽²⁻²⁾	9.50			
Noise, dBA @25°C ⁽²⁻³⁾				82
Environmental Requirements				
Operation temperature,°C		0	25	40
Storage temperature,°C		-20	25	70
Operation humidity, RH(no condensation)		10%		90%

Notes:

- (1-1) In Low Power Mode, Max Hashrate is about **Typ Hashrate *103%**
- (1-2) In Turbo Mode, Max Hashrate is about **Typ Hashrate *103%**
- (1-3) Min condition: 25°C, min J/TH, typical Hashrate
Max condition: 40°C, max J/TH, max Hashrate
- (1-4) Caution: Wrong input voltage may probably cause server damaged**
- (1-5) Typ condition: min reference power, typical AC input voltage
Max condition: max reference power, min AC input voltage
- (2-1) Including PSU size
- (2-2) Including PSU weight
- (2-3) Max condition: Fan is under max RPM(rotation per minute).

2. Setting Up the Server

To set up the server:




The file IPReporter.zip is supported by Microsoft Windows only.

1. Go to the following site:
<https://shop.bitmain.com/support.htm?pid=00720160906053730999PVD2K0vz0693>
2. Download the following file: IPReporter.zip.
3. Extract the file.




The default DHCP network protocol distributes IP addresses automatically.

4. Right-click **IPReporter.exe** and run it as Administrator.
5. Select one of the following options:
 - Shelf, Step, Position – suitable for farm servers to mark the location of the servers.
 - Default – suitable for home servers.
6. Click **Start**.

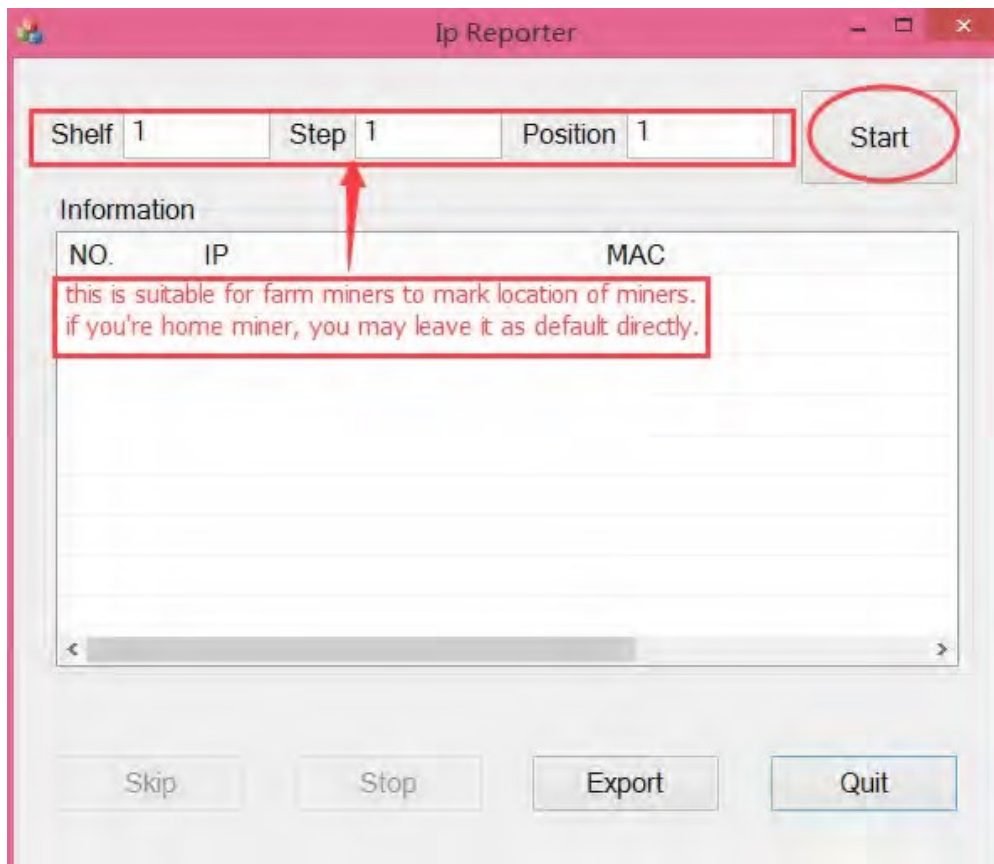


2.Setting Up the server


7. On the controller board, click the IP Report button. Hold it down until it beeps (about 5 seconds).

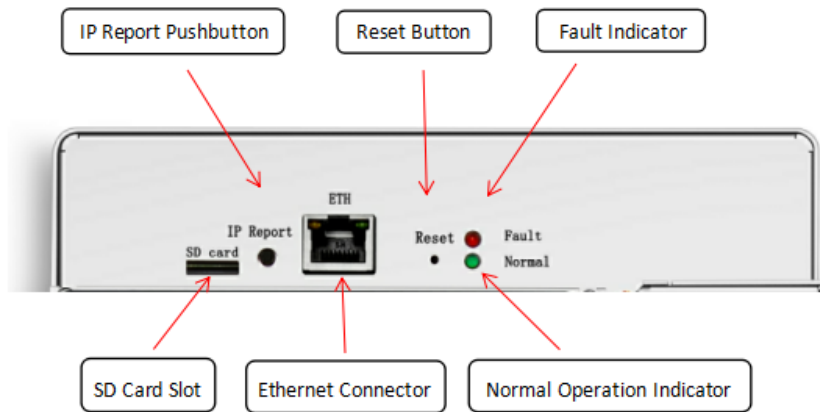

The IP address will be displayed in a window on your computer screen.

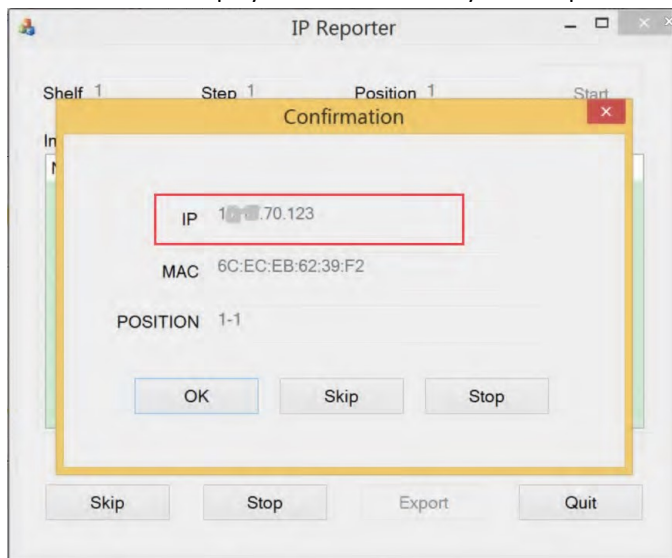

8. In your web browser, enter the IP address provided.
9. Proceed to login using root for both the username and password.
10. In the Network section, you can assign a DHCP IP address (optional).
11. Click **Save & Apply**.

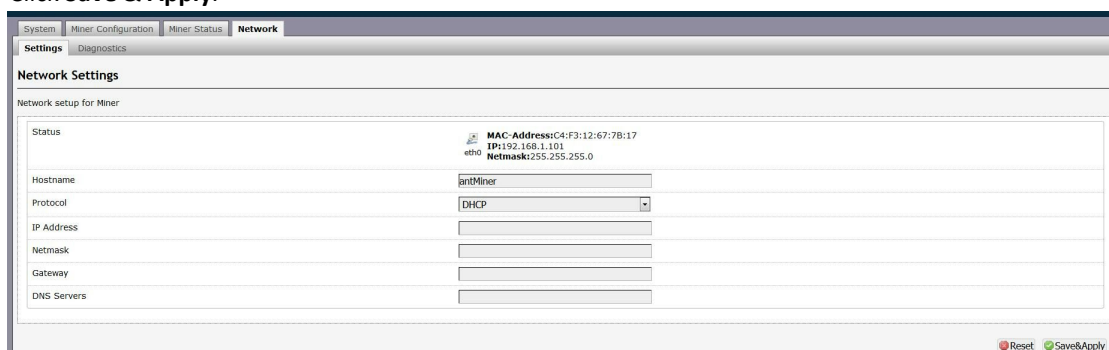


3. Configuring the Server

Setting Up the Pool

To configure the server:

1. click **General Settings**.

S17 Server:

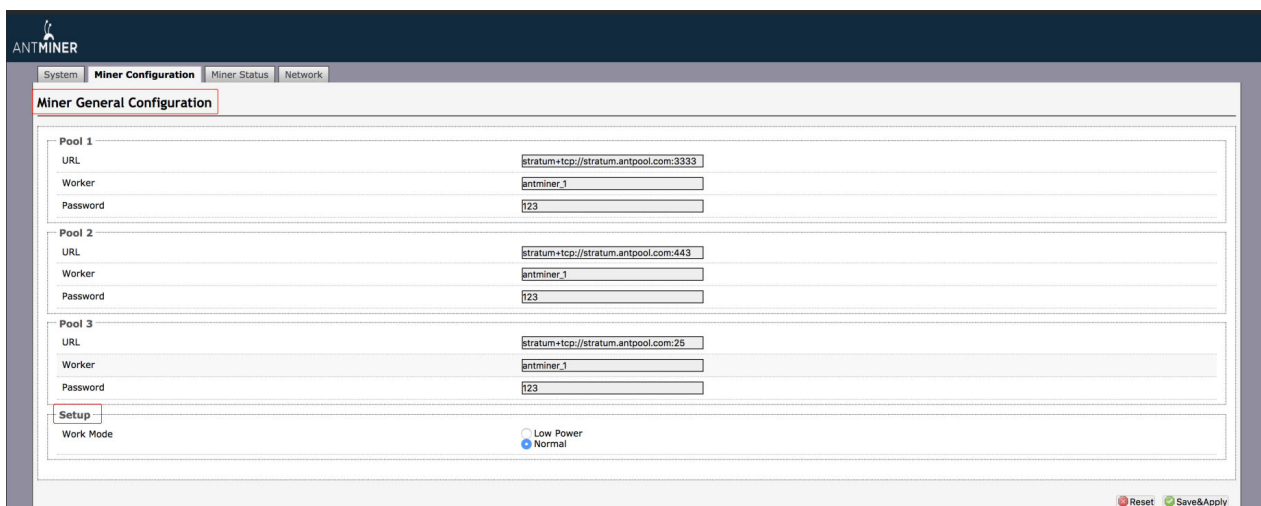


The screenshot shows the 'Miner General Configuration' page for the S17 Server. The page has tabs for 'System', 'Miner Configuration', 'Miner Status', and 'Network'. The 'Miner Configuration' tab is active. The 'Miner General Configuration' section is highlighted with a red box. It contains three pools (Pool 1, Pool 2, Pool 3) and a 'Setup' section. Each pool has fields for 'URL', 'Worker', and 'Password'. The 'Setup' section has a 'Work Mode' dropdown menu with options 'Low Power' and 'Normal' (selected). At the bottom right, there are 'Reset' and 'Save&Apply' buttons.

Pool	URL	Worker	Password
Pool 1	stratum+tcp://stratum.antpool.com:3333	antminer_1	123
Pool 2	stratum+tcp://stratum.antpool.com:443	antminer_1	123
Pool 3	stratum+tcp://stratum.antpool.com:25	antminer_1	123

Setup
Work Mode: ☐ Low Power ☒ Normal

Reset Save&Apply

S17 Pro Server:

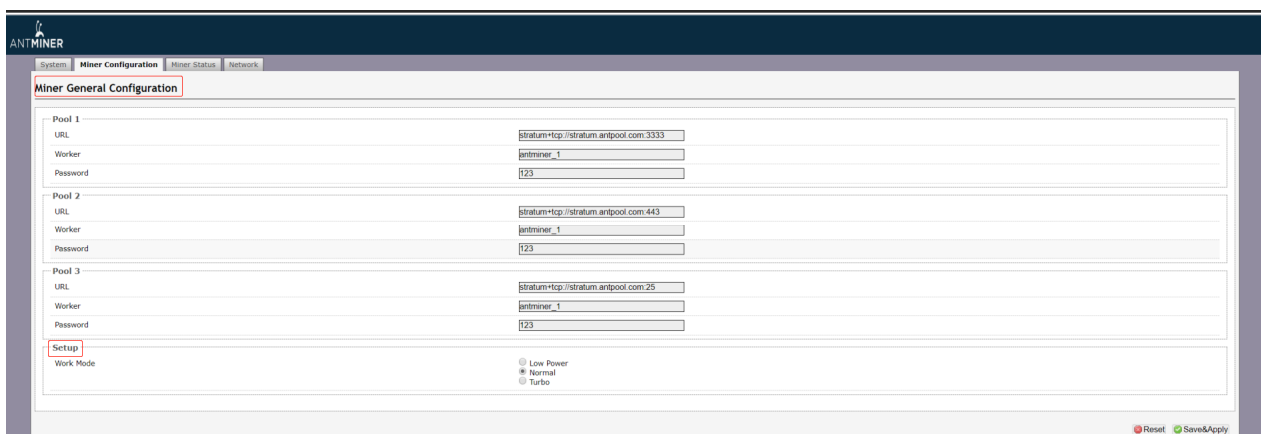

The screenshot shows the 'Miner General Configuration' page for the S17 Pro Server. The page has tabs for 'System', 'Miner Configuration', 'Miner Status', and 'Network'. The 'Miner Configuration' tab is active. The 'Miner General Configuration' section is highlighted with a red box. It contains three pools (Pool 1, Pool 2, Pool 3) and a 'Setup' section. Each pool has fields for 'URL', 'Worker', and 'Password'. The 'Setup' section has a 'Work Mode' dropdown menu with options 'Low Power', 'Normal' (selected), and 'Turbo'. At the bottom right, there are 'Reset' and 'Save&Apply' buttons.

Pool	URL	Worker	Password
Pool 1	stratum+tcp://stratum.antpool.com:3333	antminer_1	123
Pool 2	stratum+tcp://stratum.antpool.com:443	antminer_1	123
Pool 3	stratum+tcp://stratum.antpool.com:25	antminer_1	123

Setup
Work Mode: ☐ Low Power ☒ Normal ☐ Turbo


Reset Save&Apply



Note: There are three modes of Hashrate which u may adjust for S17 Pro server: Low Power mode, Normal mode and Turbo mode (High Performance Mode); two modes for S17 server: Low Power mode and Normal mode. Power consumption varies with different mode. Please refer to the specifications above for more details.

3. Configuring the Server

2. Set the options according to the following table:

Option	Description
Pool URL	<p>Enter the URL of your desired pool.</p> <div>  <p>The S17, S17 Pro servers can be set up with three mining pools, with decreasing priority from the first pool (pool 1) to the third pool (pool 3). The pools with low priority will only be used if all higher priority pools are offline.</p> </div>
Worker	Your worker ID on the selected pool.
Password	The password for your selected worker.

3. Click Save & Apply to save and restart the server.

4. Monitoring Your server

To check the operating status of your server:

1. Click the status marked below.

Here is an example of S17-53T server running under Normal mode:

System

Miner Configuration

Miner Status

Network

Miner Status

Summary

Elapsed	GH/S(RT)	GH/S(avg)	FoundBlocks	LocalWork	Utility	WU	BestShare
1d1h42m23s	54820.15	54390.51	0	18372504	11.66	763589.33	340806763

Pools

Pool	URL	User	Status	Diff	GetWorks	Priority	Accepted	Diff1#	DiffA#	DiffR#	DiffS#	Rejected	Discarded	Stale	LSDiff	LSTime
0	stratum+tcp://stratum.antpool.com:3333	antminer_1	Alive	65.5K	1933	0	17982	0	1177747456	0	0	0	48345	0	65536	0:00:09
1	stratum+tcp://stratum.antpool.com:443	antminer_1	Alive	32.8K	2	1	0	0	0	0	0	0	0	0	0	0
2	stratum+tcp://stratum.antpool.com:25	antminer_1	Alive	32.8K	2	2	0	0	0	0	0	0	0	0	0	0
total					1937	3	17982		1177747456	0	0	0	48345	0		
HW	6259															
	0.0005%															

AntMiner

Chain#	ASIC#	Frequency	GH/S(RT)	HW	Temp(PCB)	Temp(Chip)	ASIC status
1	48	560	18427.31	2953	45-63-44-59	68-78-66-76	00000000 00000000 00000000 00000000 00000000 00000000 00000000 00000000
2	48	560	17635.68	1676	46-63-45-60	66-80-66-75	00000000 00000000 00000000 00000000 00000000 00000000 00000000 00000000
3	48	575	18757.16	1630	44-61-43-59	67-77-65-77	00000000 00000000 00000000 00000000 00000000 00000000 00000000 00000000

Fan#	fan1	fan2	fan3	fan4
Speed (r/min)	3600	4800	4800	3600

Here is an example of S17 Pro- 53T server running under Turbo mode:

AntMiner

System

Miner Configuration

Miner Status

Network

Miner Status

Summary

Elapsed	GH/S(RT)	GH/S(avg)	FoundBlocks	LocalWork	Utility	WU	BestShare
1d2h47m10s	55897.60	57150.04	0	20114927	12.27	803782.76	4826310129

Pools

Pool	URL	User	Status	Diff	GetWorks	Priority	Accepted	Diff1#	DiffA#	DiffR#	DiffS#	Rejected	Discarded	Stale	LSDiff	LSTime
0	stratum+tcp://stratum.antpool.com:3333	antminer_1	Alive	65.5K	2017	0	19722	0	1291812864	0	0	0	50382	0	65536	0:00:01
1	stratum+tcp://stratum.antpool.com:443	antminer_1	Alive	32.8K	2	1	0	0	0	0	0	0	0	0	0	0
2	stratum+tcp://stratum.antpool.com:25	antminer_1	Alive	32.8K	2	2	0	0	0	0	0	0	0	0	0	0
total					2021	3	19722	0	1291812864	0	0	0	50382	0		
HW	7377								0.0006%							

AntMiner

Chain#	ASIC#	Frequency	GH/S(RT)	HW	Temp(PCB)	Temp(Chip)	ASIC status
1	48	595	18119.44	2904	43-61-41-56	67-77-66-76	00000000 00000000 00000000 00000000 00000000 00000000 00000000 00000000
2	48	595	19306.88	1434	44-62-42-58	66-80-65-75	00000000 00000000 00000000 00000000 00000000 00000000 00000000 00000000
3	48	595	18471.27	3039	41-59-40-56	64-74-66-73	00000000 00000000 00000000 00000000 00000000 00000000 00000000 00000000

Fan#

Speed (r/min)

fan1

3720

fan2

3720

fan3

4920

fan4

4800



Note: The S17, S17 Pro servers are with automatic frequency. Firmware will stop running when the Temp(PCB) reaches to 75°C, there will be an error message "Fatal Error: Temperature is too high!" shown in the bottom of kernel log page.

2. Monitor your server according to the descriptions in the following table:

Option	Description
ASIC#	Number of chips detected in the chain.
Frequency	ASIC frequency setting.
GH/S(RT)	Hash rate of each hash board (GH/s).
Temp(PCB)	Temperature of each hash board (°C). (Applied only to server with fixed frequency).
Temp(Chip)	Temperature of the chips on each hash board (°C).
ASIC status	<p>One of the following statuses will appear:</p> <ul style="list-style-type: none"> ● O - indicates OK ● X - indicates error ● - - indicates dead


5. Administering Your Server

5.1 Checking Your Firmware Version

To check your firmware version:

1. In **System**, click the **Overview** tab.
2. **File System Version** displays the date of the firmware your server uses. In the example below, the server is using firmware version 20190408.


S17 Server:

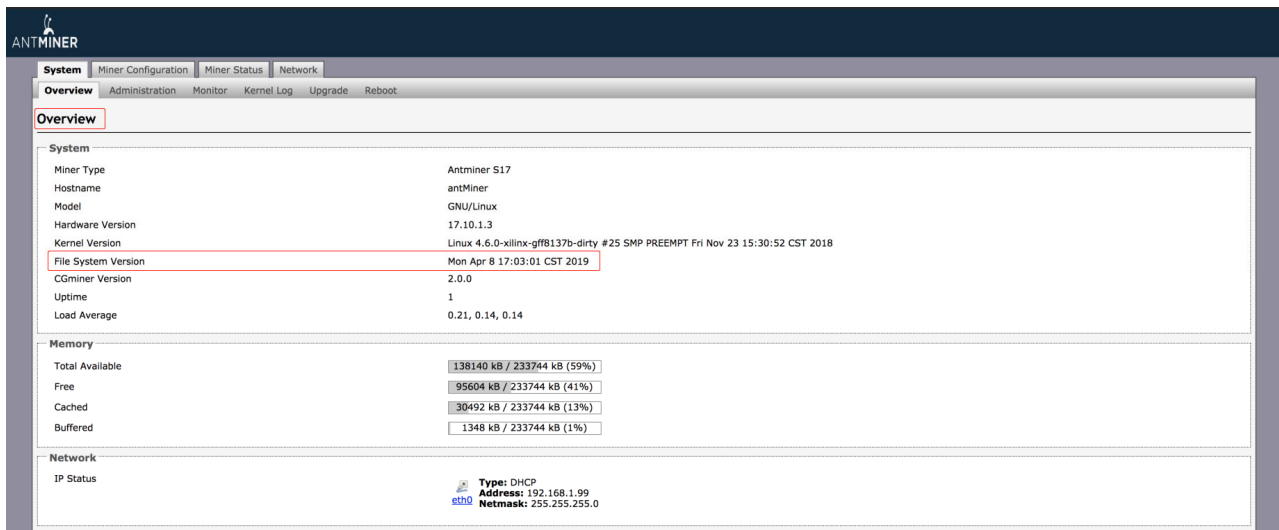


The screenshot shows the AntMiner S17 Server Overview page. The 'File System Version' is highlighted with a red box, indicating the firmware version used by the server.

System	
Miner Type	Antminer S17
Hostname	antMiner
Model	GNU/Linux
Hardware Version	17.10.1.3
Kernel Version	Linux 4.6.0-xilinx-gf8137b-dirty #25 SMP PREEMPT Fri Nov 23 15:30:52 CST 2018
File System Version	Mon Apr 8 17:03:01 CST 2019
CGminer Version	2.0.0
Uptime	1
Load Average	0.21, 0.14, 0.14

Memory	
Total Available	138140 kB / 233744 kB (59%)
Free	95604 kB / 233744 kB (41%)
Cached	30492 kB / 233744 kB (13%)
Buffered	1348 kB / 233744 kB (1%)

Network	
IP Status	<div>  Type: DHCP Address: 192.168.1.99 Netmask: 255.255.255.0 </div>


S17 Pro Server:

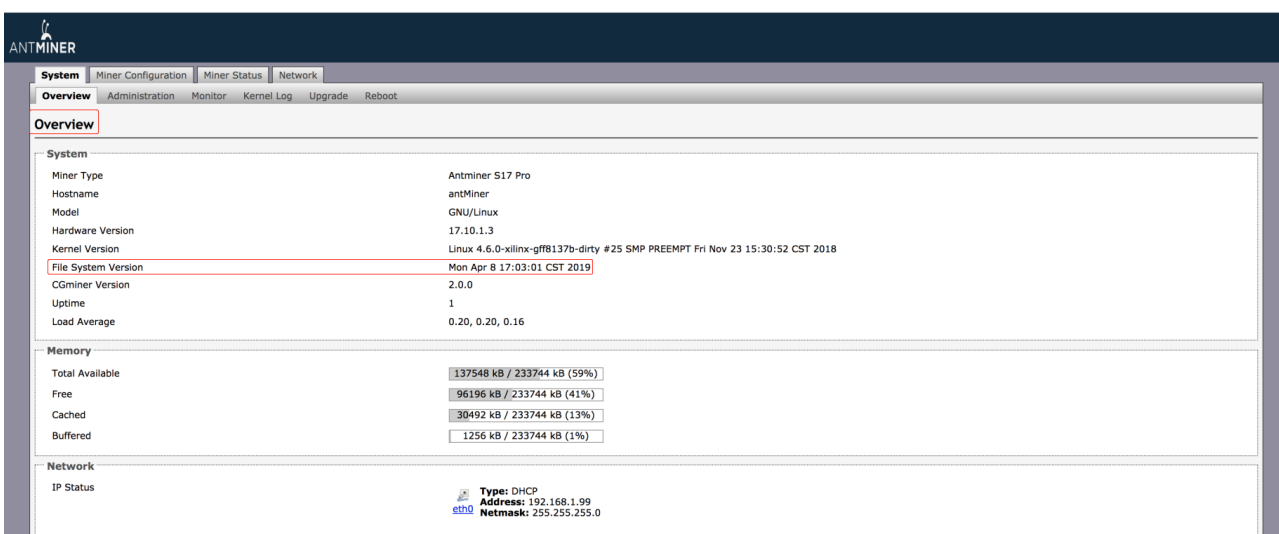

The screenshot shows the AntMiner S17 Pro Server Overview page. The 'File System Version' is highlighted with a red box, indicating the firmware version used by the server.

System	
Miner Type	Antminer S17 Pro
Hostname	antMiner
Model	GNU/Linux
Hardware Version	17.10.1.3
Kernel Version	Linux 4.6.0-xilinx-gf8137b-dirty #25 SMP PREEMPT Fri Nov 23 15:30:52 CST 2018
File System Version	Mon Apr 8 17:03:01 CST 2019
CGminer Version	2.0.0
Uptime	1
Load Average	0.20, 0.20, 0.16

Memory	
Total Available	137548 kB / 233744 kB (59%)
Free	96196 kB / 233744 kB (41%)
Cached	30492 kB / 233744 kB (13%)
Buffered	1256 kB / 233744 kB (1%)

Network	
IP Status	<div>  Type: DHCP Address: 192.168.1.99 Netmask: 255.255.255.0 </div>


5.2 Upgrading Your System



Make sure that the S17, S17 Pro servers remain powered during the upgrade process. If power fails before the upgrade is completed, you will need to return it to Bitmain for repair.

To upgrade the server's firmware:

1. In System, click **Upgrade**.

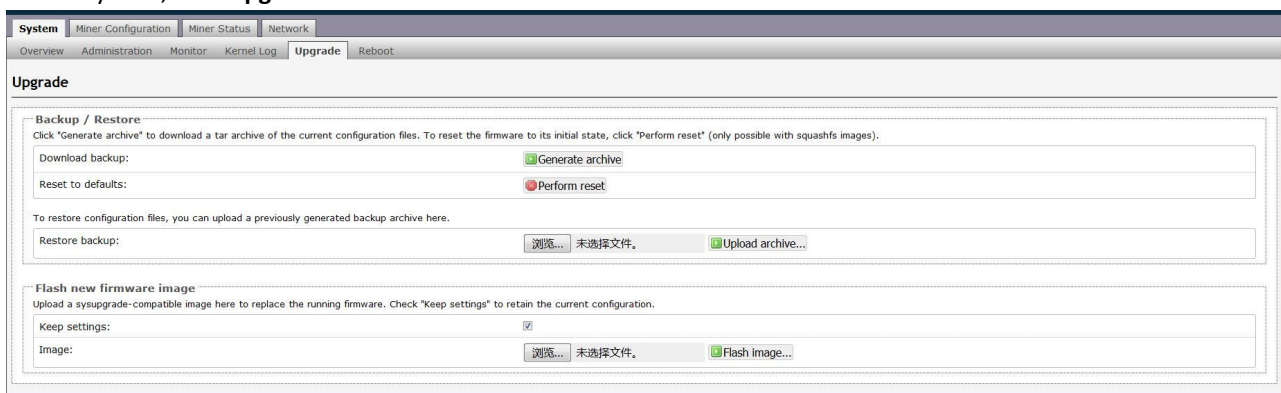

The screenshot shows the 'System' tab with the 'Upgrade' sub-tab selected. The page is titled 'Upgrade' and contains two main sections: 'Backup / Restore' and 'Flash new firmware image'.

Backup / Restore: This section includes instructions to click 'Generate archive' to download a tar archive of the current configuration files. It also has a 'Reset to defaults' option with a 'Perform reset' button. Below this, there is a 'Restore backup' section with a file selection button (labeled '浏览...') and an 'Upload archive...' button.


Flash new firmware image: This section includes instructions to upload a sysupgrade-compatible image here to replace the running firmware. It has a 'Keep settings' checkbox (which is checked) and a file selection button (labeled '浏览...') followed by a 'Flash image...' button.

2. For **Keep Settings**:

- Select the check box to keep your current settings (default).
- Clear the check box to reset the server to default settings.

3. Click the **选择文件 (Browse)** button and navigate to the upgrade file. Select the upgrade file, then click **Flash image**. A message appears notifying you if the S17, S17 Pro firmwares can be upgraded and if yes, will then proceed to flash the image.

4. When the upgrade is completed, the following message appears:

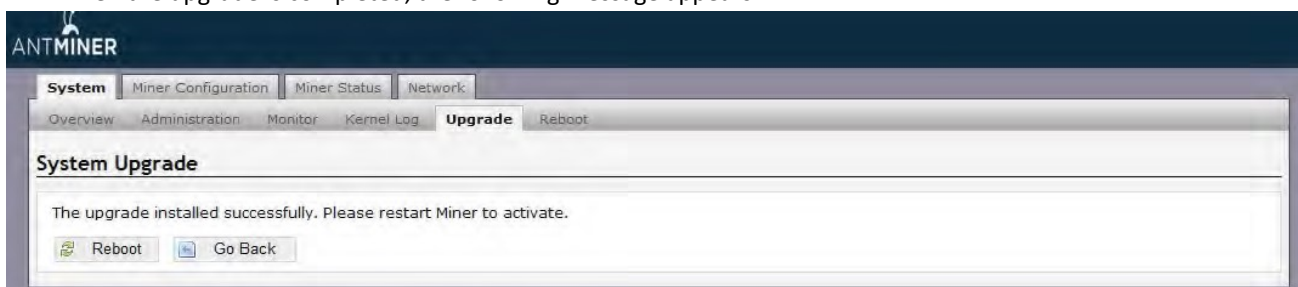

The screenshot shows the 'System' tab with the 'Upgrade' sub-tab selected. The page is titled 'System Upgrade' and displays a success message: 'The upgrade installed successfully. Please restart Miner to activate.' Below the message are two buttons: 'Reboot' and 'Go Back'.


5. Click one of the following options:

- **Reboot** - to restart the server with the new firmware.
- **Go Back** - to continue mining with the current firmware. The server will load the new firmware next time when it is restarted.

5.3 Modifying Your Password

To change your login password:

1. In **System**, click the **Administration** tab.
2. Set your new password, then click **Save & Apply**.

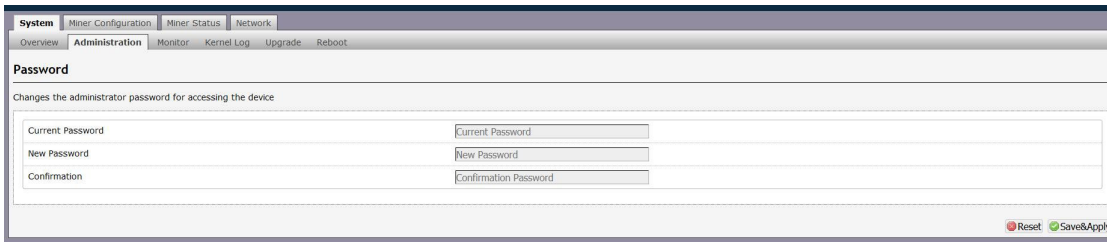

The screenshot shows the Antminer web interface. At the top, there are tabs: System, Miner Configuration, Miner Status, and Network. Under the System tab, there are sub-tabs: Overview, Administration, Monitor, Kernel Log, Upgrade, and Reboot. The Administration tab is selected. Below the tabs, the title is "Password". The subtitle is "Changes the administrator password for accessing the device". There are four input fields: Current Password, New Password, Confirmation Password, and a second New Password field. At the bottom right, there are two buttons: Reset (with a red circle icon) and Save&Apply (with a green checkmark icon).

5.4 Restoring Initial Settings

To restore your initial settings

1. Turn on the server and let it run for 5 minutes.
2. On the controller front panel, press and hold the **Reset** button for 10 seconds.



Resetting your server will reboot it and restore its default settings. The red LED will automatically flash once every 15 seconds if the reset is operated successfully.

Environmental Requirements

Please run your server in accordance with the following requirements

1. Basic Environmental Requirements:

1.1. Climatic Conditions:

Description	Requirement
Operating Temperature	0-40°C
Operating Humidity	10-90%RH (non-condensing)
Storage Temperature	-20-70°C
Storage Humidity	5-95%RH (non-condensing)
Altitude	<2000m

1.2. Site Requirements of the Server Running Room:

Please keep the server running room away from industrial pollution sources:

For heavy pollution sources such as smelters and coal mines, the distance should be more than 5km.

For moderate pollution sources such as chemical industries, rubber and electroplating industries, the distance should be more than 3.7km.

For light pollution sources such as food factories and leather processing factories, the distance should be more than 2km.

If unavoidable, the site should be chosen in the perennial upwind direction of the pollution source.

Please do not set your location within 3.7km from the seaside or the salt lake. If unavoidable, it should be built as airtight as possible, equipped with air conditioning for cooling.

1.3. Electromagnetic Environmental Conditions:

Please keep your site away from transformers, high-voltage cables, transmission lines and high-current equipment, for example, there should be no high-power AC transformers (>10KA) within 20 meters, and no high-voltage power lines within 50 meters.

Please keep your site away from high-power radio transmitters, for example, there should be no high-power radio transmitters (>1500W) within 100 meters.

2. Other Environmental Requirements :

The server running room shall be free of explosive, conductive, magnetically conductive and corrosive dust. The requirements of mechanical active substances are shown below:

2.1 Requirements of Mechanical Active Substances

Mechanical Active Substance	Requirement
Sand	$\leq 30\text{mg}/\text{m}^3$
Dust (suspended)	$\leq 0.2\text{mg}/\text{m}^3$
Dust (deposited)	$\leq 1.5\text{mg}/\text{m}^2\text{h}$

2.2 Requirements of Corrosive Gas

Corrosive Gas	Unit	Concentration
H ₂ S	ppb	< 3
SO ₂	ppb	< 10
Cl ₂	ppb	< 1
NO ₂	ppb	< 50
HF	ppb	< 1
NH ₃	ppb	< 500
O ₃	ppb	< 2
Note: ppb (part per billion) refers to the unit of concentration , 1ppb stands for the volume ratio of part per billion.		

Regulations:

FCC Notice (FOR FCC CERTIFIED MODELS):

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note:

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

EU WEEE: Disposal of Waste Equipment by Users in Private Household in the European Union



This symbol on the product or on its packaging indicates that this product must not be disposed of with your other household waste. Instead, it is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling of waste electrical and electronic equipment. The separate collection and recycling of your waste equipment at the time of disposal will help to conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment. For more information about where you can drop off your waste equipment for recycling, please contact your local city office, your household waste disposal service or the shop where you purchased the product.

台灣 ROHS:

設備名稱: S17,S17 Pro 服務器, 型號: 240-Aa

單元	有害物質					
	鉛 (Pb)	汞 (Hg)	鎘 (Cd)	六價鉻 (Cr+6)	多溴聯苯 (PBB)	多溴二苯醚 (PBDE)
外殼	○	○	○	○	○	○
電路板組件	—	○	○	○	○	○
其他線材	—	○	○	○	○	○
<p>備考 1. “超出 0.1 wt %” 及 “超出 0.01 wt %” 係指限用物質之百分比含量超出百分比含量基準值。</p> <p>備考 2. “○” 係指該項限用物質之百分比含量未超出百分比含量基準值。</p> <p>備考 3. “—” 係指該項限用物質為排除項目</p>						