


Output	DC Voltage	12.15V
	Rated (220V input) Current	133A
	Rated (110V input) Current	100A
	Rated (220V input) Power	1600W
	Rated (110V input) Power	1200W
	Ripple & Noise	<1%
	Voltage Regulation	<2%
	Source Regulation	<1%
	Load Regulation	<1%
	Setup, Rise Time	<2S
	Power off Protection Trip Time	>9mS
	Interface Type	9 pairs of 6 pin PCI-E connectors.
Input	Voltage Range	100-240V AC
	Starting Voltage	95-105V AC
	Frequency Range	47-63Hz
	Power Factor	>0.95 (full load)
	Leakage Current	<1.5mA (220V 50Hz)
Protection	Low-voltage Input	80-89V AC
	Output Short Circuit	Yes
	Output Overcurrent	134-185A max.
	Overheat Protection	Yes
Environment Conditions	Operating Temperature	-20°C - 50°C
	Operating Humidity	20% - 90% relative humidity (non-condensing)
Structure	Dimensions	220mm*108mm*62mm
Cooling	Fan	Forced-air cooling

Efficiency Curve



Temperature derating curve

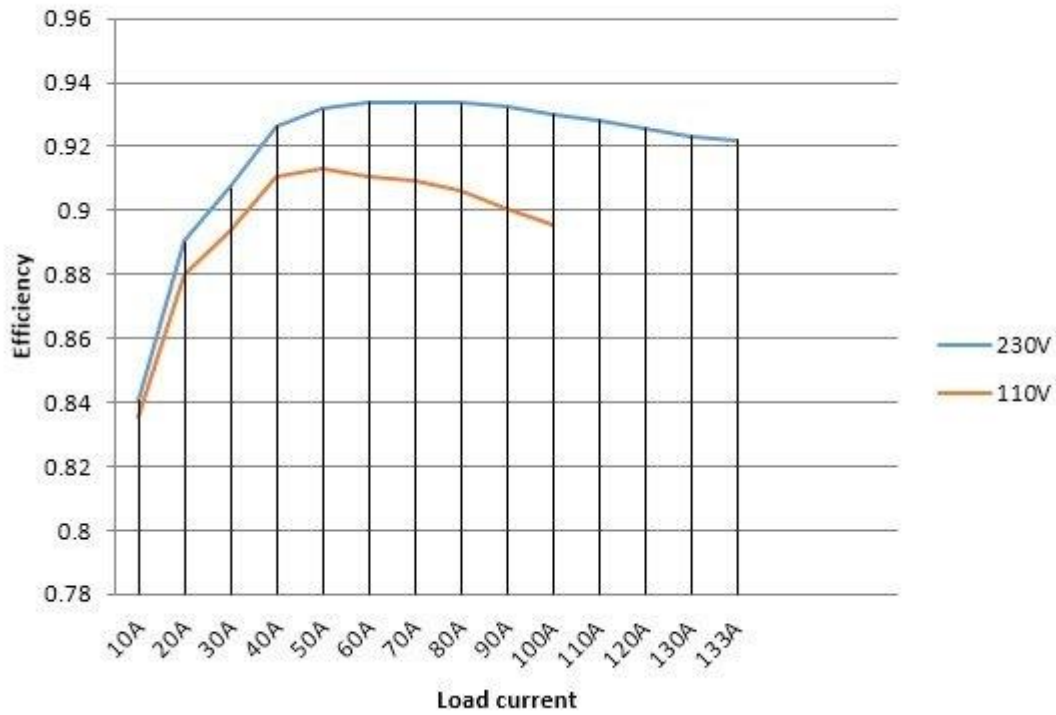